


公差				
尺寸	A	B	C	D
0~5	±0.07	±0.10	±0.15	±0.20
>5~20	±0.10	±0.15	±0.20	±0.30
>20~50	±0.15	±0.20	±0.30	±0.40
>50~100	±0.20	±0.30	±0.40	±0.60
>100	±0.30	±0.50	±0.60	±1.00
角度	±20'	±40'	±90'	±180'

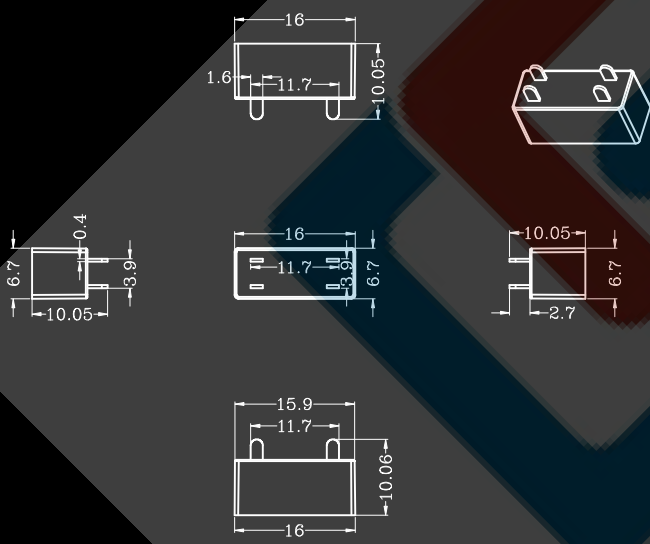

序号	修改记录	日期	设计	批准

- material: Contacts--brass, T=0.4mm  
Insulator--Glass Filled PBT, 94-V0;
- terminal finish: Tin plated;
- removed burrs and sharp edge.
- MINI auto plug fuse
- Suitable rated current: 30A@500VAC
- Insertion and extraction force: 1Kg Min
- Dielectric Strength: Min.AC1000V
- Contact Resistance: Max 50mΩ.
- temperature rise: 50° Max.
- Insulation Resistance At 500V DC: 100MΩ
- product model GF-C41 (Brand GFEFUSE Gongfu)

公差 TOLERANCE	批准 吕斌	材质 MATERIAL	型号 GF-C41
数量 QUANTITY	审核	表面处理 FINISHED	名称 FUSE HOLDER
	吕斌	比例 SCALE	料号 GF20170603
单位 mm	设计 吕斌	东莞市贡福电子有限公司	

