


PTF (15S) fuse holder (PCB welded 5.2x 20mm fuse holder)

1. Dimension drawing

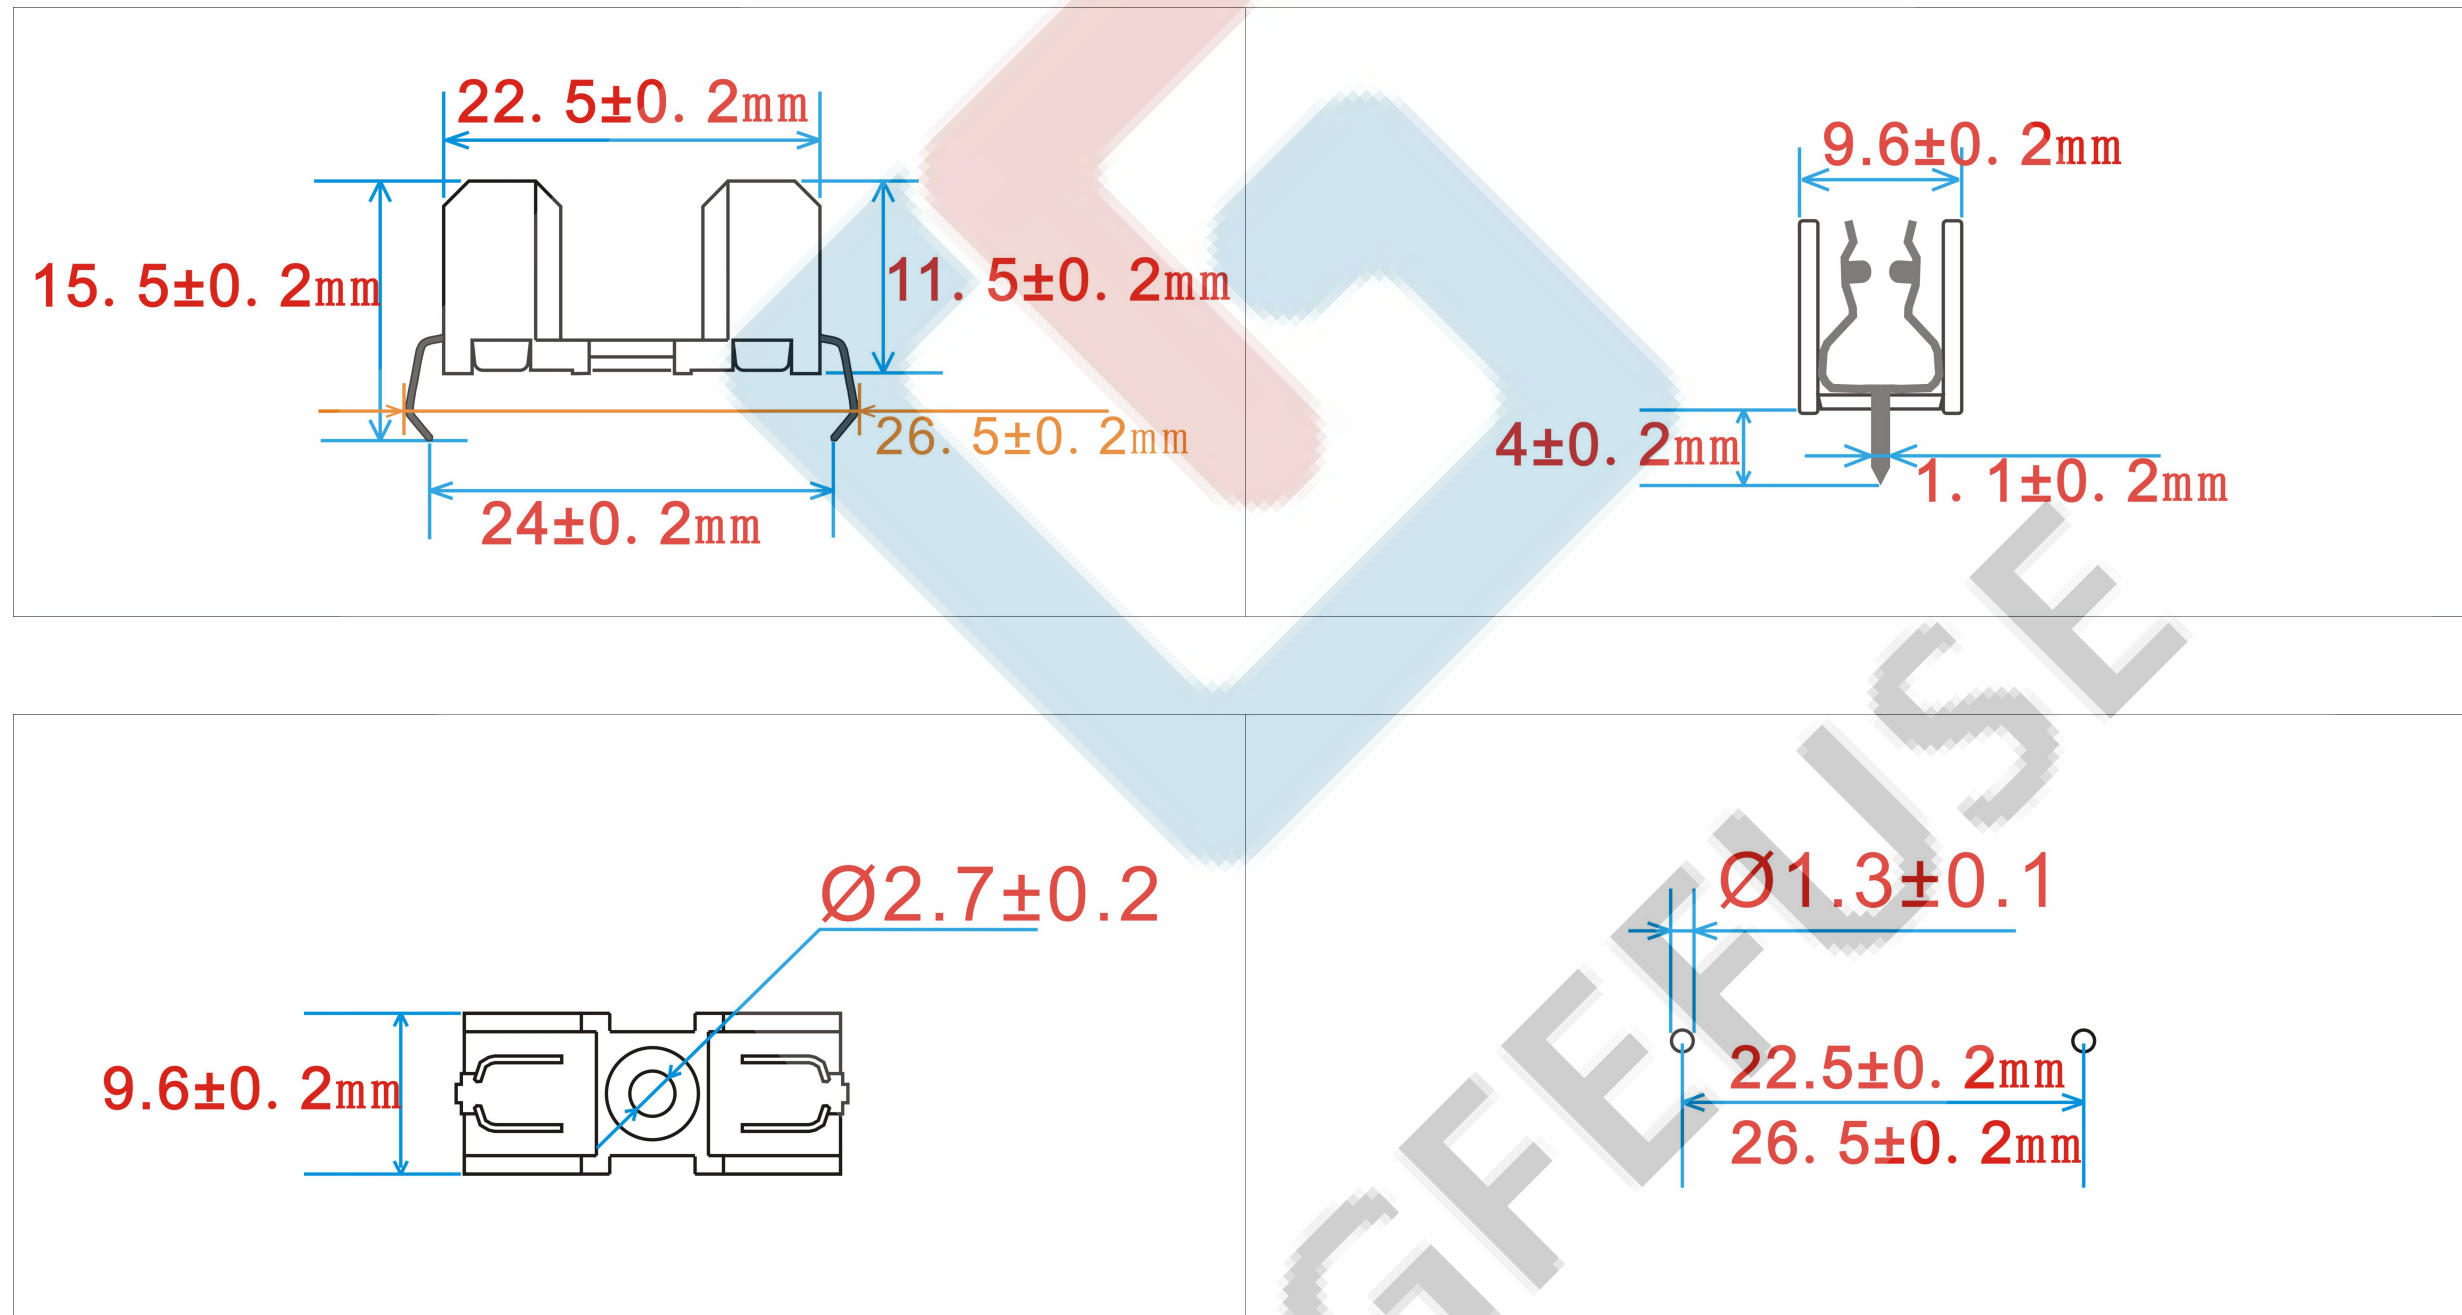

The company has obtained the quality system certification of IATF:16949:2016 automobile industry.
The product has obtained UL CE CQC TUV REACH and many international certification.

PTF (15S) fuse holder (PCB welded 5.2x 20mm fuse holder)

2. Product introduction

- **Product model: PTF (15S)**
- **Applicable fuse: 5.2x20mm**
- **Suitable for PCB installation and welding**
- **Terminals: Tin copper alloy**
- **Base: PBT + GF30**
- **Working voltage: 500V (250V) AC**
- **Rated current: 16A**
- **Working temperature: - 40℃ - 130℃**
- **Flame Retardant Grade: UL-94V0**
- **Welding temperature: 230℃-240℃ (3 seconds)**
- **Insulation Resistance: > 10 MΩ(500 VDC: 1 min)**
- **Voltage withstand: 1500V (dc)**

Promotion: The company's products are not notified of changes

The company has obtained the quality system certification of IATF:16949:2016 automobile industry.
The product has obtained UL CE CQC TUV REACH and many international certification.